



Product Specification Sheet

Series Insect Rearing Chamber

LED Lighting

Temperature and Humidity

Model irc-rh-800

800 litre insect rearing chamber

LED lighting

Temperature and humidity control







Product Specification Sheet

Series Insect Rearing Chamber

LED Lighting

Temperature and Humidity

Model irc-rh-800

800 litre insect rearing chamber LED lighting

Temperature and humidity contro

Chamber capacity 800 Litres

Standard dual chamber design 1 set of shelves per door

Chamber width 705 mm
Chamber depth 600 mm
Chamber height 849 mm

Single chamber design Optional
Chamber width 1490 mm
Chamber depth 600 mm
Chamber height 849 mm

Chamber material Stainless Steel 304L

External width 1895 mm
External depth 762 mm
External height 1440 mm

External material Durable epoxy powder-coated steel

Recommended clearance 75mm on sides and rear

Temperature range 4 to 70C
Temperature sensor Pt100
Control accuracy 0.1 C
Temporal stability 0.2 C

Available shelf positions 16 (8 per door)
Shelves supplied 4 (2 per door)
Shelf dimensions 690 x 590 mm

Shelf spacing 95 mm Shelf capacity 50 KG

Insulation type Mineral Wool - asbestos free

Insulation thickness 50mm





Product Specification Sheet

Series Insect Rearing Chamber

LED Lighting

Temperature and Humidity

Model irc-rh-800

800 litre insect rearing chamber LED lighting

Temperature and humidity contro

Compressor size 3/4 HP

Refrigerant CFC-Free R134a

Lighting source Waterproof LED - rear mounted

Lighting colour Cool and warm white (Independently adjustable)

Lighting control Infinitely adjustable

Electrical supply Single phase, 220 - 240V, 50 - 60 Hz

(alternatives available on request)

Element rating 1 kW

Circulating fan 2

Controller type Multifunction intelligent digital PID-microprocessor

Readout Digital LCD readout of set and actual temperature

Temperature alarms High | low | deviation

Programmable control 500 step programmable control of temperature, humidity

and lighting

Country of origin Australia





Product Specification Sheet

Series Insect Rearing Chamber

LED Lighting

Temperature and Humidity

Model irc-rh-800

800 litre insect rearing chamber


LED lighting

Temperature and humidity control

Humidity Range 20 - 90% RH

Humidity sensor

Control accuracy 0.1 % Temporal stability 0.5 %

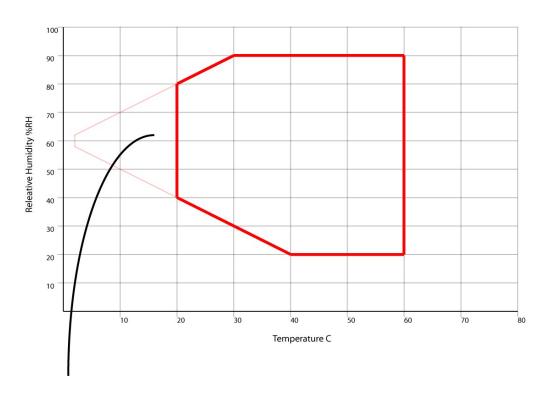

If the temperature setpoint is below 20 or above 80C, the RH control will be disabled and the chamber will adopt a natural value depending on the internal chamber conditions

This graph is a guide only Variations to the envelope can occur due to ambient conditions, the intensity of internal lighting, heat loads or humidity loads, and the nature of the product placed within the chamber.





800 litre insect rearing chamber LED lighting emperature and humidity control

Product Specification Sheet

Series Insect Rearing Chamber

LED Lighting

Temperature and Humidity

Model irc-rh-800

Options / Accessories

- Single chamber design
- Additional shelves
- Inner viewing door toughened glass
- Double glazed glass door
- Side access port 50 mm
- Fan speed controller
- Internal power supply*
- RS232 or RS485 comms module
- Ethernet comms module
- ISPM 15 compliant crating for export
- Calibration certificate
- *Maximum temperature limited to 50C